





Anti-Terrorism Bollard (Separated Hydraulic Unit)

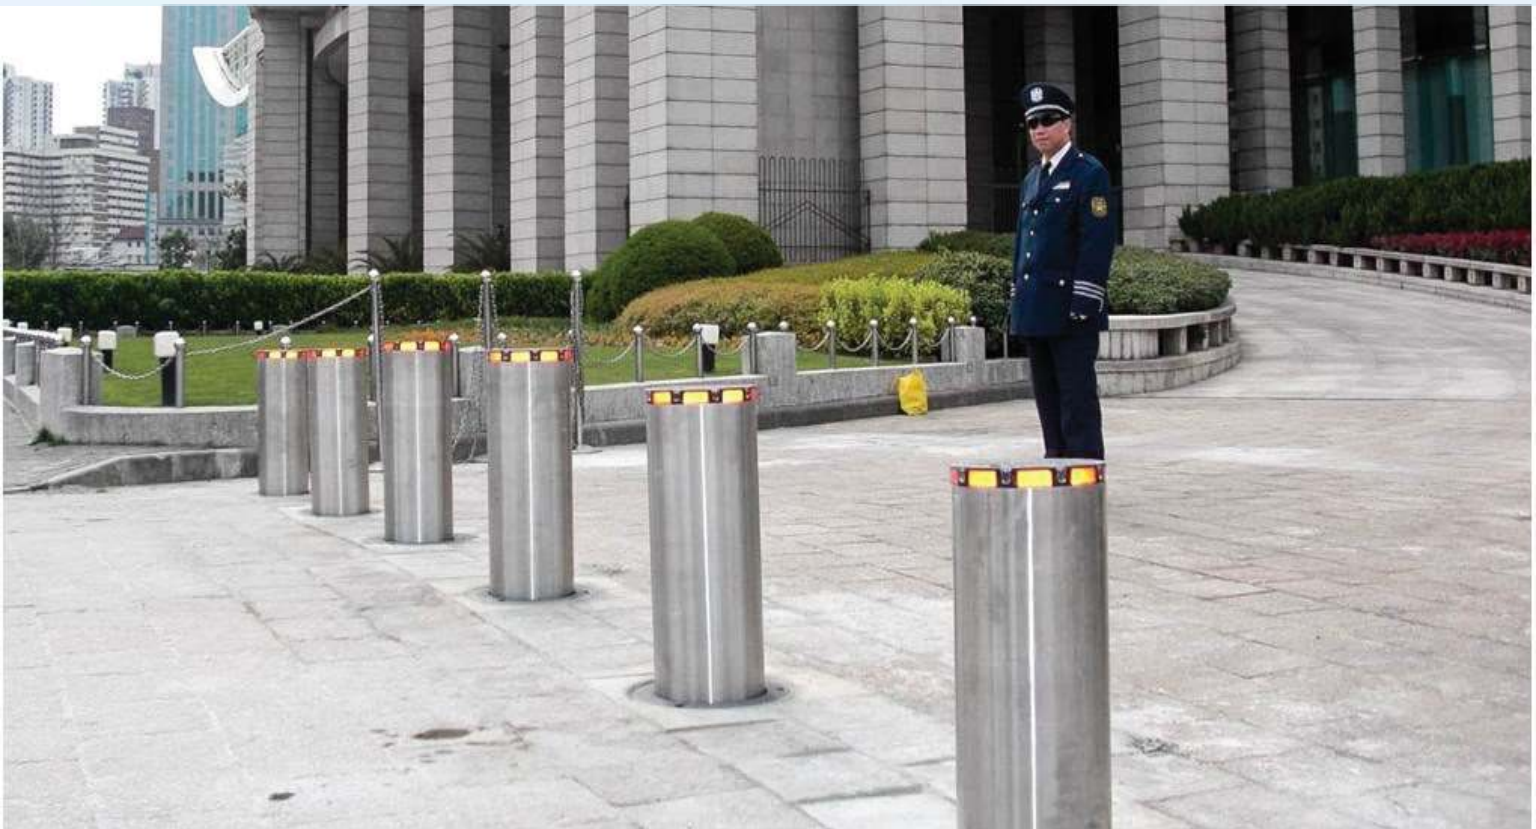

Anti-terrorism Bollard (Separated Hydraulic Unit)

NS-ATBS10-200-600-35
NS-ATBS10-220-900-35
NS-ATBS10-275-900-35

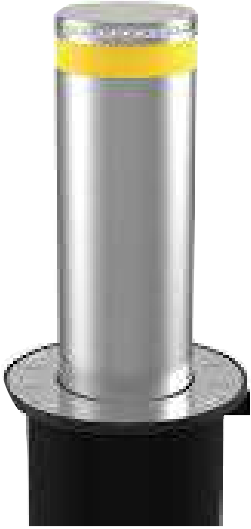

Features

- » Separated hydraulic system
- » Anti-terror robust construction bollard with high impact resistance up to 1700Kj
- » User safety
- » High visibility gloss and reflective
- » Emergency operation

Item No.	NS-ATBS10-200-600-35	NS-ATBS10-220-900-35	NS-ATBS10-275-900-35
Diameter	220mm	220mm	275mm
Blocking Height	600mm	900mm	900mm
Cylinder Thickness	35mm	35mm	35mm
Cylinder material	Carbon steel / 304SS / 316SS		
Bollard pit material	Carbon steel		
Voltage	220V 50Hz		
Surface treatment	Carbon steel: Galvanization and powder coated (color can be customized according to RAL No.) Stainless steel: Hairline polish		
Rising speed	30cm/S		
Lowing speed	20cm/S		
IP Level	IP 67		
Working temperature	-40℃ — +70℃		
Frequency use	High intensive		
Impact resistance	20000Kj		
Reflective tape	One 3M diamond series reflective, customized logo is available		
LED light	Red LED light		
Accessories	Remote controller*2		
Optional	Push button, loop detector, photocell, buzzer, traffic light, heater can be optional		



Disclaimer: Brief product specifications are mentioned, that may change without prior notice, please check with OEM before purchase. Images are shown for reference only; the actual product may differ due to product enhancement.