

## FENCING BOOM BARRIER NS-BS2-P6S03LF

The Fencing boom barrier is a sturdy system designed for access control. It has got a Fencing Arm design with a maximum boom length of up to 4.5 meters. It offers quick opening and closing times of 1.5 to 6 seconds, It can be controlled remotely from up to 100 meters away.



Scan to visit website

### Features

- ▶ Fencing boom design Maximum up to 4.5 meter boom length
- ▶ Quick 1.5 to 6-second opening/closing
- ▶ DC brushless motor with 150W power
- ▶ IP54 rating for weather resistance
- ▶ RS485 communication interface (Optional)
- ▶ High MCBF of 6+ million cycles

### Benefits


- ▶ Efficient and secure access control
- ▶ Accommodates various boom lengths
- ▶ Fast and reliable operation
- ▶ Durable construction for longevity
- ▶ Powerful motor for smooth performance
- ▶ Suitable for diverse weather conditions

### Technical Specifications

Weight Dimensions	55 kg
Working	976 x 335 x 231mm
Temperature	(HWD) -35°C~+65°C

# Technical Specifications

Power Supply	DC 24V
Open/close Speed	1.5Sec-6 Sec (Configurable)
Motor Power	150W
Driving Method	DC Brushless Motor
Output Interface	RS-485 (Optional), Relay
Output Power	Relay (NO/NC)
Torque	56.8 N.m
Power failure Action	Auto Open
Protection Grade	IP54
Duty Cycle	6+ Million
Remote Control	≤100m open place
Motor No - load Speed	1850r/min
Max Boom Length	Up to 4.5m
Arm swing-out function	Yes, When the vehicle hit the barrier gate, the arm can be swing out to avoid further damage.
LED indicator	Yes, Red/Green
Boom Type	Fencing Arm

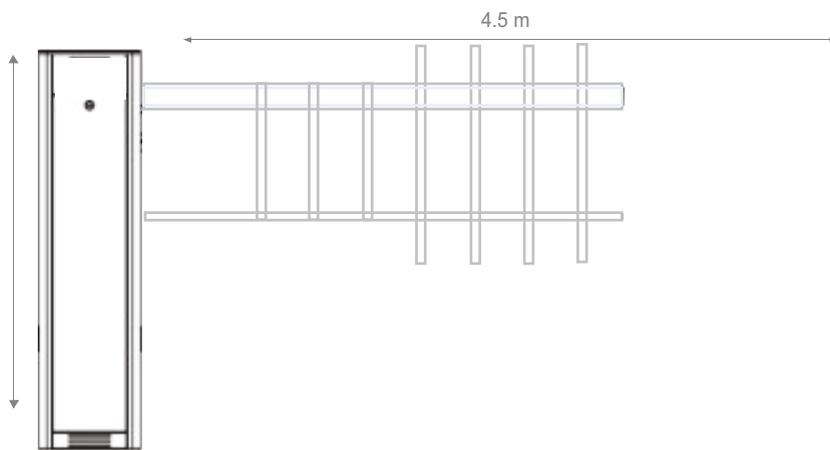

**Disclaimer:** Brief product specifications are mentioned, that may change without prior notice, please check with OEM before purchase. Images are shown for reference only; the actual product may differ due to product enhancement.