



BOOOM BARRIER



SPRINGLESS BOOM BARRIER NS-BS3-M214-SL

Springless boom barrier is a versatile security device used to control vehicular access in parking lots, residential complexes, industrial facilities, and commercial areas. It consists of a horizontal bar or arm that can be raised or lowered to allow or restrict entry. It has got a 4.5-meter boom length, featuring a DC brushless motor.



scan to visit website

Features

- ▶ Boom length 4.5 meters for extended reach
- ▶ Swift opening/closing in just 3 seconds
- ▶ Compact housing: 325x220x1000 mm (WxDxH)
- ▶ Efficient DC Brushless motor with 100 Watts
- ▶ IP54 rating for dust and water resistance
- ▶ Reliable 12V Relay Signal input interface

Benefits


- ▶ Efficient control with ultra-fast operation
- ▶ Compact design saving space
- ▶ DC Brushless motor ensures reliability.
- ▶ Sturdy construction for enhanced durability.
- ▶ Easy arm direction change for flexible operations.
- ▶ Auto open on power restoration ensures efficiency.

Technical Specifications

Boom length	4.5 Mtr
Opening / Closing	3 Sec

Technical Specifications

Housing Size (In mm)	325*220*1000 (W*D*H)
Motor Type	DC Brushless
Motor Power	100 Watt
IP Rating	IP 54
Input Interface	12 Volt Relay Signal
Working Temperature	(-30 to + 80)
Remote control Distance	<=30 mtr
MTBF	5 Million
Spring	No Spring
Power Off	Auto Open
Arm Direction Change	Easy
Weight	35 KG

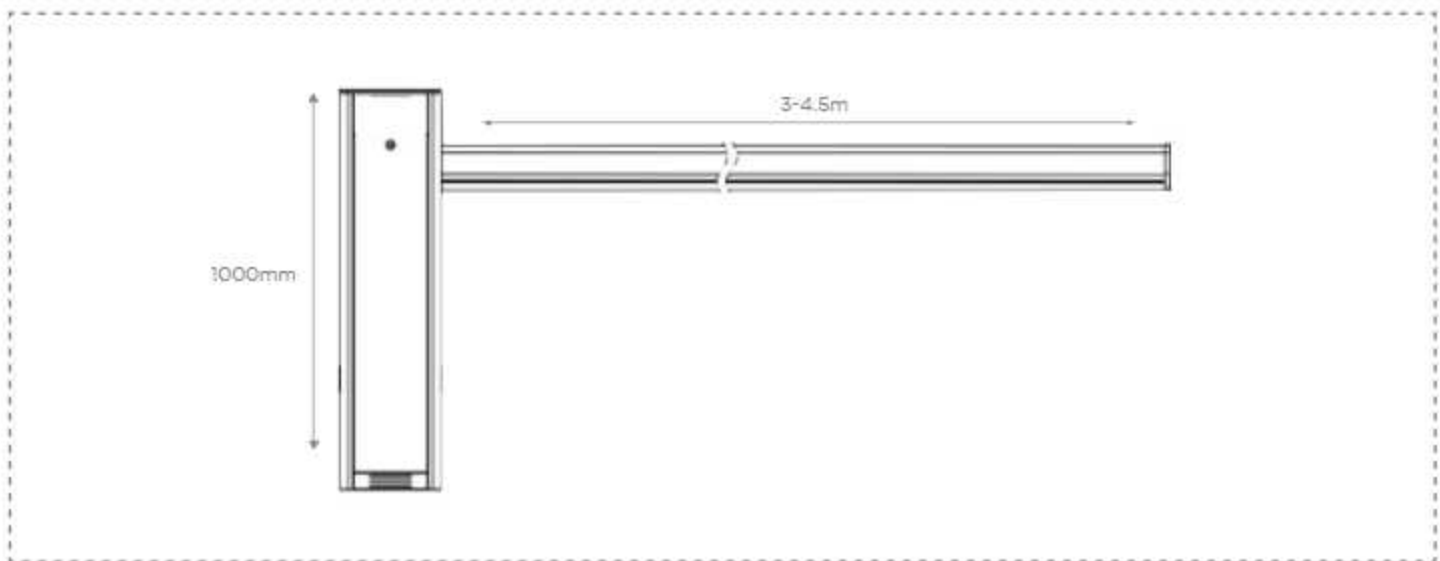

Disclaimer: Brief product specifications are mentioned, that may change without prior notice, please check with OEM before purchase. Images are shown for reference only, the actual product may differ due to product enhancement.