





BOOM BARRIER

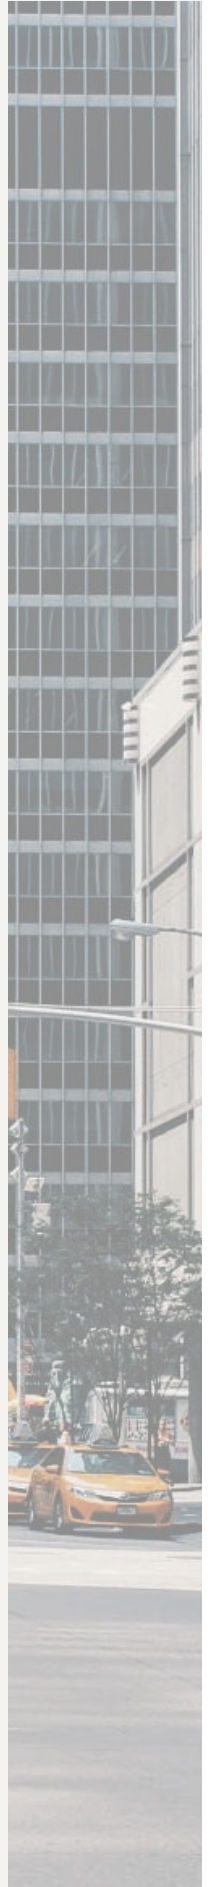

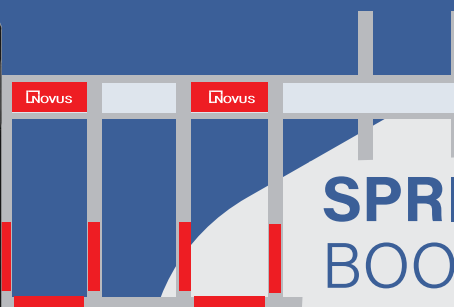

SPRINGLESS FENCING BOOM BARRIER NS-BS3-M214-SLFC

Springless fencing boom barrier is a versatile security device used to control vehicular access in parking lots, residential complexes, industrial facilities, and commercial areas. It consists of a horizontal bar or arm that can be raised or lowered to allow or restrict entry. It has got a 4 meter boom length, featuring a DC brushless motor.



scan to visit website

Features

- ▶ Boom length 4 meters for extended reach
- ▶ Swift opening/closing in just 3 seconds
- ▶ Compact housing: 325x220x1000 mm (WxDxH)
- ▶ Efficient DC Brushless motor with 100 Watts
- ▶ IP54 rating for dust and water resistance
- ▶ Reliable 12V Relay Signal input interface

Benefits


- ▶ Efficient control with ultra-fast operation
- ▶ Compact design saving space
- ▶ DC Brushless motor ensures reliability.
- ▶ Sturdy construction for enhanced durability.
- ▶ Easy arm direction change for flexible operations.
- ▶ Auto open on power restoration ensures efficiency.

Technical Specifications

Boom Type	Fencing
Boom length	4 M

Technical Specifications

Opening / Closing	3 Sec
Housing Size (In mm)	325*220*1000 (W*D*H)
Motor Type	DC Brushless
Motor Power	100 Watt
IP Rating	IP 54
Input Interface	12 Volt Relay Signal
Working Temperature	(-30 to + 80)
Remote control Distance	<=30 mtr
MCBF	6+ Million
Spring	No Spring
Power Off	Auto Open
Arm Direction Change	Easy
Weight	35 KG
Motor Torque	120 NM
Motor RPM	1500r/min

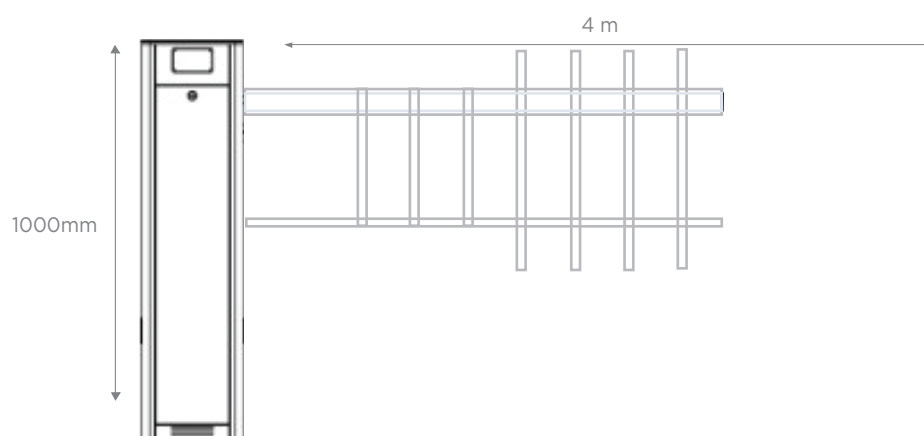

Disclaimer: Brief product specifications are mentioned, that may change without prior notice, please check with OEM before purchase. Images are shown for reference only; the actual product may differ due to product enhancement.