




BOOM BARRIER



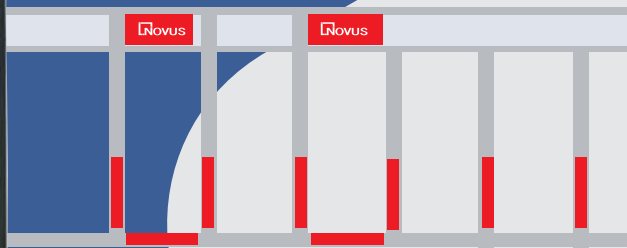

FENCING BOOM BARRIER NS-BS8-V40D1F

Our telescopic fencing boom barrier, with a maximum length of 4 meters, is designed for efficiency. Boasting a powerful DC brushless motor operating at 1500 RPM, it delivers rapid 2 to 5-second opening and closing times. Made up of the finest grade Iron with a anti-corrosive coating of paint, the offered device ensures optimum durability.



scan to visit website

Features

- ▶ Accommodates up to 4 meters of barrier length.
- ▶ Opens and closes within 2 to 5 seconds.
- ▶ Built with robust iron for long-lasting durability
- ▶ Utilizes a 140W DC brushless motor with 1500 RPM.
- ▶ Space-efficient dimensions at 300x340x1000 mm.
- ▶ Can Withstand tough atmospheric conditions.

Benefits

- ▶ Boom barrier provides a robust physical barrier.
- ▶ Rapid opening and closing times for swift access.
- ▶ Iron and steel construction ensures longevity.
- ▶ 140W DC brushless motor requires minimal upkeep.
- ▶ Compact dimensions make it easy-to-install.
- ▶ Adaptive to customized requirements.

Technical Specifications

Boom type	Fencing
Boom length	4 meter fencing
Opening / Closing	2 to 5 Sec
Housing Size (In mm)	300*340*1000 (W*D*H)
Housing Material (MS /Steel)	Iron + paint
Motor Type	DC Brushless
Motor Power	140 Watt
Motor RPM	1500r/min
Motor Torque	0.64n.m
IP Rating	IP 54
Input Interface	Radar and Ground induction coil signals
Working Temperature	-25 to + 75
Remote Control Distance	≥ 30 meter
MCBF	5 million Times
No. of Springs	1
When Power off how to open Boom	manual Operation
Housing Colour	Orange+ Black+grey
Weight	50 KG



Disclaimer: Brief product specifications are mentioned, that may change without prior notice, please check with OEM before purchase. Images are shown for reference only; the actual product may differ due to product enhancement.