

PARKING



Novus

BOOM BARRIER



BOOM BARRIER NS-BS8-V60D2

Boom barrier is an essential security device with versatile applications. Our 6-meter telescopic boom barrier offers rapid 1.5 to 6-second opening and closing times, suitable for various facilities. Its robust iron and painted steel housing, and a powerful DC brushless motor ensure durability and reliability. It also features arm direction change capability, enhancing traffic control.



scan to visit website

Features

- ▶ Telescopic boom up to 6 meters.
- ▶ Rapid 1.5-6 sec opening/closing.
- ▶ Supports MCBF 5 million times.
- ▶ Powerful 100W DC brushless motor.
- ▶ Compact 350x260x980 mm dimensions.
- ▶ Arm direction change capability included.

Benefits


- ▶ Boom barrier prevents unauthorized access effectively
- ▶ Rapid opening/closing minimizes congestion
- ▶ Sturdy iron and steel construction ensures longevity
- ▶ DC brushless motor requires minimal upkeep
- ▶ Compact dimensions fit various installation sites
- ▶ Arm direction change supports versatile access control

Technical Specifications

Boom type (Round / Elliptical / Telescopic)	6 Meter Telescopic
Boom length	Up to 6 meter Straight Bar

Technical Specifications

Opening / Closing	1.5 to 6 Sec
Housing Size (In mm)	350*260*980 (W*D*H)
Housing Material (MS /Steel)	Iron + paint
Motor Type	DC Brushless
Motor Power	100Watt
Motor RPM	1500r/min
Motor Torque	0.64n.m
IP Rating	IP 54
Input Interface	Radar and Ground induction coil signals
Working Temperature	-25 to + 75
Remote Control Distance	≥ 30 meter
MCBF	5 million Times
No. of Springs	1
When Power off how to open Boom	manual Operation
Arm Direction Change (yesh /No)	yes
Housing Color	Grey - Yellow- Black
Weight	37KG

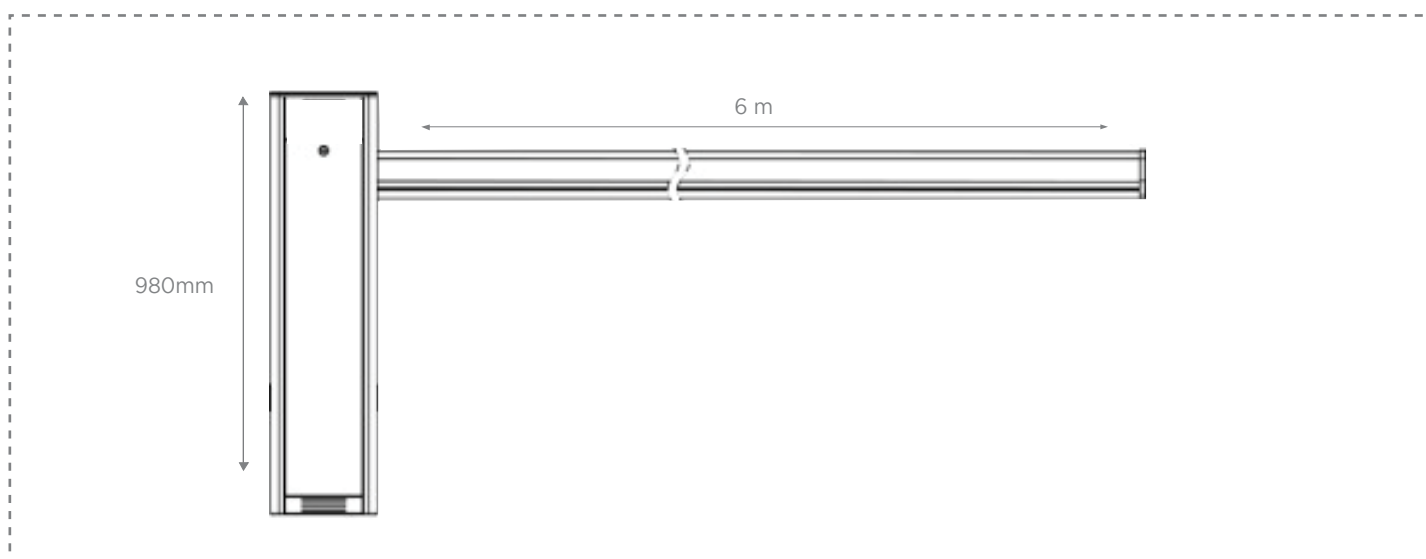

Disclaimer: Brief product specifications are mentioned, that may change without prior notice, please check with OEM before purchase. Images are shown for reference only; the actual product may differ due to product enhancement.