



SWING BARRIER

Entrance Management System

Model : NS-SS9-V240






Swing Barrier NS-SS9-V240



Overview

We provide superior-grade swing barrier that is an entrance control device designed for rapid and efficient pedestrian entry. Equipped with fast-operating mechanisms, the offered turnstile is ideal for areas with high foot traffic, like office buildings, airports, and stadiums. swing barrier ensures quick throughput while effectively regulating access.

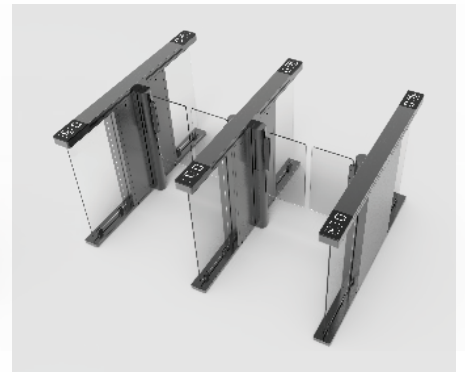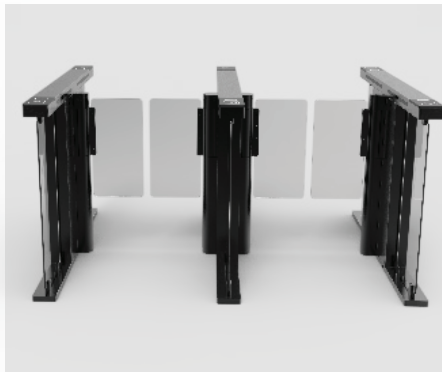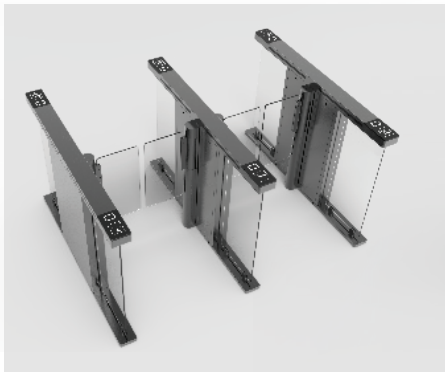

Features

- ▶ SUS 304 stainless steel with sleek vacuum plating.
- ▶ Offers single or bi-directional passage.
- ▶ Boasts a throughput rate of 40p/m.
- ▶ Quick response with a 0.2s reaction time
- ▶ Features 4 pairs of active infrared detectors.
- ▶ Utilizes a brushless servo motor for resilience.

Benefits

- ▶ Compact design maximizes use of available space.
- ▶ Designed to optimize entrance control in buildings.
- ▶ It ensures swift and seamless user flow.
- ▶ Fast operation ensures security and efficiency.
- ▶ Active infrared detectors provide intrusion detection.
- ▶ Super capacitor backup ensures continuous functionality

Technical Specifications

Product Size	1500*120*1000mm
Material	SUS 304 stainless steel; vacuum plating
Thickness	1.5mm (≤900mm optional)
Pass Width	600mm
Passage Direction	Single directional / Bi-directional
Throughput Rate	40p/m
Reaction Time	0.2S
Acoustic Alarm	Buzzer Alarm
LED	Triple Color LED
Driving Voltage	DC24V 6.25A
Power Input	AC220V,50Hz
Working Temperature	-20~+70 C
Sensor	4 pairs of active infrared intrusion detector
Motor	Brushless Servo Motor
Mechanism	Brushless Speed Gate Mechanism
Back up power	Supercapacitor (12V/3A)
Weight	≤ 60 kg
IP Rating	44
MCBF	6 + Million
Torque motor	Higher



Disclaimer: Brief product specifications are mentioned, that may change without prior notice, please check with OEM before purchase. Images are shown for reference only; the actual product may differ due to product enhancement.